How To add the SAS controller

46.SA000.A01

1

The first thing to do is to check the position of the jumper JP3. It must be short pins 2-3, as shown in the picture below.

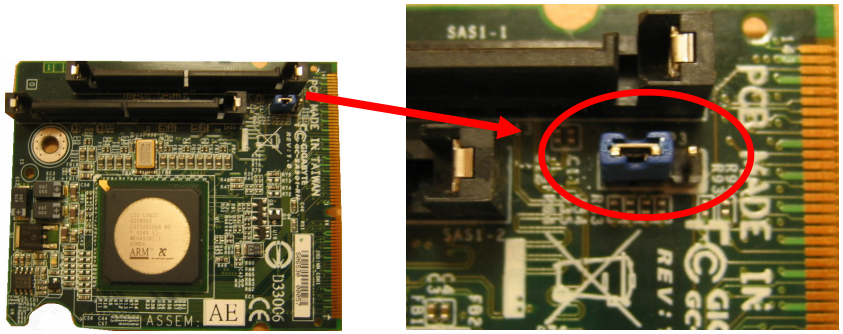

2

Plug the card into the horizontal white connector, close to the Green PCI-X slot and then secure it to the mainboard with a screw.

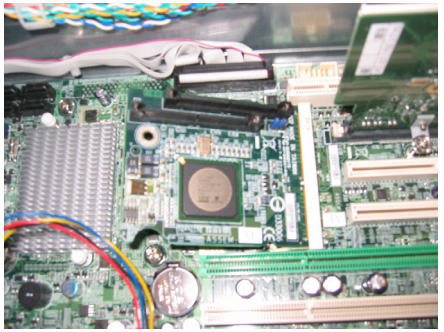

3

Plug the first SAS Cage cable into the bottom connector.

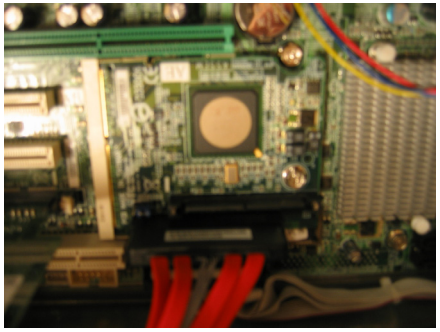

4

Please download the latest firmware and bios from the Acer support website and upgrade the card.

http://support.acer-euro.com

All the How To guides can be found on http://support.acer-euro.com/documents/howto/
SO.SA000.A00 - Altos Array G540 SAS controller, SAS 8 ports. Support RAID 0,1, Daughterboard plus cables, does not take PCI slots